




Combined Minimum Tillage
Series
CML XXL



ma/ag
MACCHINE AGRICOLE

Combined Minimum Tillage SERIES CML XXL

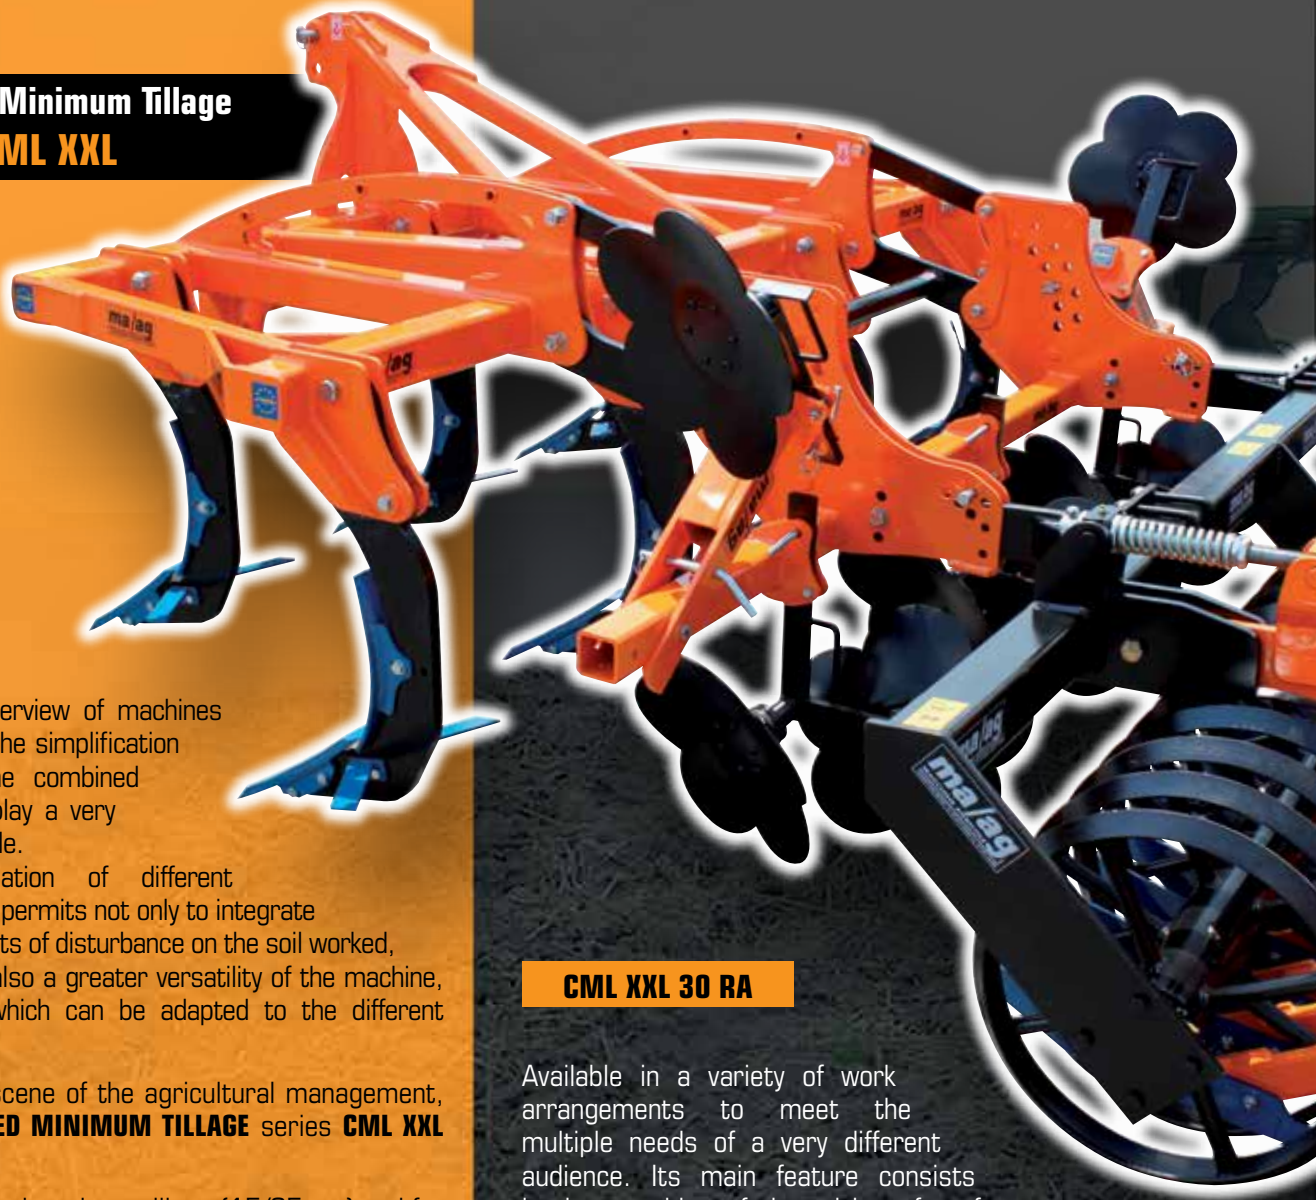

Inside the overview of machines available for the simplification of tillage, the combined equipments play a very interesting role.

The combination of different working tools permits not only to integrate different effects of disturbance on the soil worked, but it offers also a greater versatility of the machine, the use of which can be adapted to the different conditions.

In this new scene of the agricultural management, the **COMBINED MINIMUM TILLAGE** series **CML XXL** fights under.

Conceived for the minium tillage (15/25 cm) and for working deep (until 40 cm) if it was necessary, the Combined Minimum Tillage proposes itself as a real alternative to plowing.

CML XXL 30 RA

Available in a variety of work arrangements to meet the multiple needs of a very different audience. Its main feature consists in the matching of the mixing of surface crop residues, with more pronounced action of disturbance produced by the front anchors with special clutch.

CML XXL 30 RA




Brought on lift, available in the version with fixed frame or hydraulic foldable in 2 sections for reducing the floor space to m 2, 50 during the transport on road.



STANDARD EQUIPMENT

- A** III point linkage to the tractor.
- B** Rigid anchors arranged on 2 working rows with safety device by a shearbolt. Interchangeable reversible share. Wide wings customizable.
- C** Rear levelling kit with parallelogram, adjustable, with couple of breaking and tilting discs mounted on special support. Standard with lateral containment couple of discs.
- D** Finishing rear roller (available in different type).

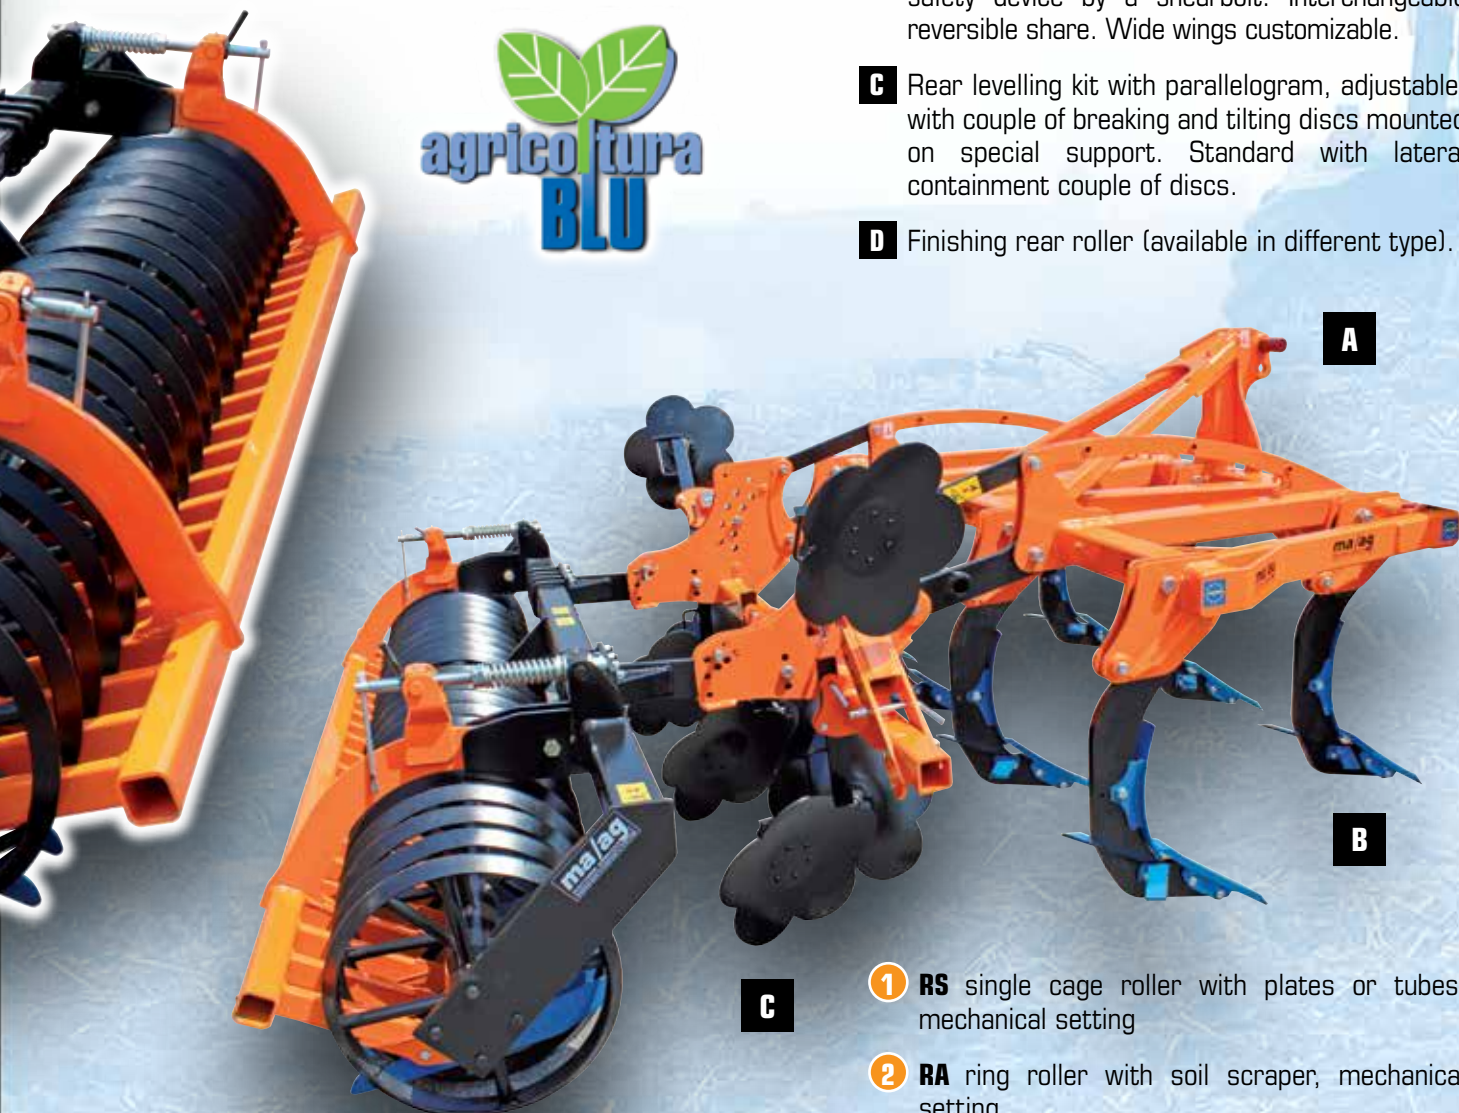

D 2

- C**
 - 1 **RS** single cage roller with plates or tubes, mechanical setting
 - 2 **RA** ring roller with soil scraper, mechanical setting
 - 3 **RP** packer roller, mechanical setting
 - 4 **RF** double wavy roller, breaker, mechanical setting



Single cage roller,
mechanical setting

1

Paker roller,
mechanical setting

3

Double wavy roller, breaker,
mechanical setting

4



CML XXL 30 RA

Brought on lift version – Fixed frame

MODEL	FRAME	WORKING WIDTH (m)	TRANSPORT WIDTH (m)	ANCHORS (N°)	HP
CML XXL25	FIXED	2,50	2,50	5	140/170
CML XXL30	FIXED	3,00	3,00	7	160/190
CML XXL40	FIXED	4,00	4,00	9	220/250

Brought on lift version, foldable hydraulic frame in 2 section

MODEL	FRAME	WORKING WIDTH (m)	TRANSPORT WIDTH (m)	ANCHORS (N°)	HP
CML I XXL40	HYDR. FOLDING	4,00	2,50	13	220/250
CML I XXL50	HYDR. FOLDING	5,00	2,50	16	250/280
CML I XXL60	HYDR. FOLDING	6,00	2,50	22	280/320

ma/ag
MACCHINE AGRICOLE

26011 Casalbuttano (Cremona) - ITALY

www.ma-ag.com - info@ma-ag.com

Via Giovanni Paolo II, 12

Tel. +39 0374 362680

Fax +39 0374 362280



MADE IN ITALY

